



Specification

Page 1/8



LED High Bay

UFO-C

100W/150W/200W/240W/300W



Hook



Chain



Wall Mounting



UFO C series is designed by our sophisticated R&D team featuring high-efficiency, energy-saving and efficient heat-dissipation.

Due to its premium quality and excellent performance, UFO C series attains a range of international certifications.

And it is a perfectly ideal choice for different applications involving warehouse, stadium, workshop, industrial plant, airport, railway station, etc.

▶▶▶ FEATURES

■ Emergency Back up Battery Available

Emergency time: 1.5 hours/3 hours

■ Smart Control

Motion sensor function available

■ Power Adjustable

200W: Power can be adjusted to 200W, 150W, 100W

150W: Power can be adjusted to 150W, 100W, 80W

■ CCT Tunable

3000K/4000K/5000K Or 4000K/5000K/6000K

■ High Lumen Efficiency

Compared with the 140 lm/W that is popular in the industry, it is higher and brighter,

Two options: 130lm/W, 170lm/W

■ Energy Saving Up To 80-85%

Super bright and energy saving. Saving energy up to 80-85%, which can reduce electricity costs by 80%

■ Equipped With Reflector

(OPTIONAL ACCESSORIES)

Improve lighting by up to 20% and reduce light loss



Power Adjustable



Sensor



6000K



5000K



4000K




3000K



SPECIFICATION

Model NO.	ET-UHB-xxWC1 DKBXV	ET-UHB-xxWC2 DKBXV	ET-UHB-xxWC3 DKBXV	ET-UHB-xxWC4 DKBXV
Input Voltage	AC100-277V/120-347V	AC100-277V/120-347V	AC100-277V/120-347V	AC100-277V/120-347V
Power Consumption(±5%)	100W	150W(150/100/80W Adjustable)	200W(200/150/100W Adjustable)	240W/300W
Power Factor	0.95	0.95	0.95	0.95
Driver	VENAS Brand	VENAS Brand	VENAS Brand	VENAS Brand
Intelligent Control	1-10V Dimmable/DALI	1-10V Dimmable/DALI	1-10V Dimmable/DALI	1-10V Dimmable/DALI
LED Chip	2835	2835	2835	2835
Efficiency (±10%)	130lm/W; 170lm/W	130lm/W; 170lm/W	130lm/W; 170lm/W	130lm/W; 170lm/W
CCT	2700K-6500K	2700K-6500K	2700K-6500K	2700K-6500K
CRI	70/80	70/80	70/80	70/80
Beam Angle	60°/90°/120°	60°/90°/120°	60°/90°/120°	60°/90°/120°
IP Rating	IP65	IP65	IP65	IP65
IK Rating	IK10	IK10	IK10	IK10
Working Temperature	-40°C(-40°F) - +50°C(122°F)	-40°C(-40°F) - +50°C(122°F)	-40°C(-40°F) - +50°C(122°F)	-40°C(-40°F) - +50°C(122°F)
Lifespan	50,000 Hours	50,000 Hours	50,000 Hours	50,000 Hours
Warranty	5 Years	5 Years	5 Years	5 Years
Housing	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum
Lens Material	Anti-UV PC Optical Material	Anti-UV PC Optical Material	Anti-UV PC Optical Material	Anti-UV PC Optical Material
Net Weight	1.9kg(4.2lbs)	2.7kg(6.0lbs)	3.3kg(7.3lbs)	5.1kg(11.2lbs)
Gross Weight	2.3kg(5.1lbs)	3.1kg(6.8lbs)	3.8kg(8.4lbs)	5.7kg(12.6lbs)
Product Dimension	Ø253x149mm(Ø10.0x5.9inch)	Ø308x155mm(Ø12.1x6.1inch)	Ø353x160mm(Ø13.9x6.3inch)	Ø404x168mm(Ø16.0x6.6inch)
Packing Size	310x310x170mm(12.2x12.2x6.7inch)	330x330x170mm(13.0x13.0x6.7inch)	370x370x170mm(14.6x14.6x6.7inch)	420x240x170mm(16.5x16.5x6.7inch)

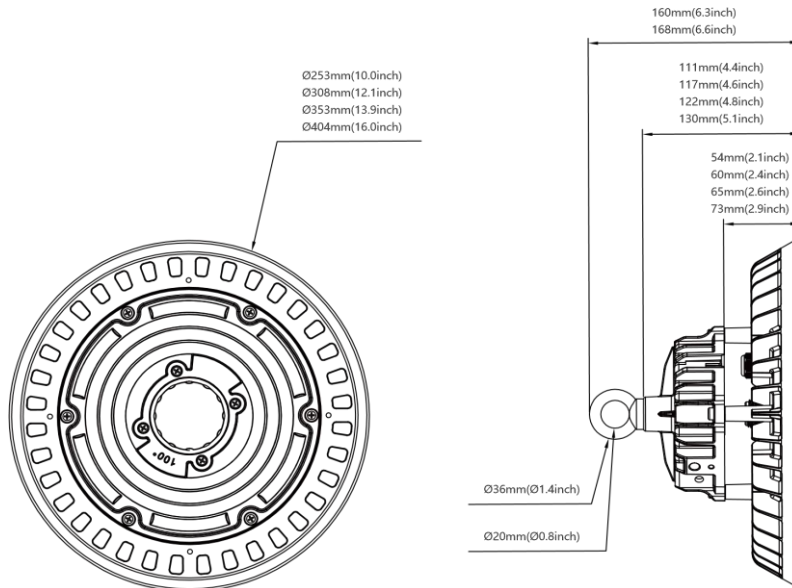


Ordering Information


UHB	xxW <small>www.led.com</small>	Ci	D	K	B	X	V
UFO Light	Wattage 100W 150W 200W 240W 300W	C series C1-C2-C3-C4	DY=Dimmable DN=No Dimmable	CCT 2700-6500K	B60° B90° B120°	X1= 130Lm/w X2= 170Lm/w	V= 277 100-277V V= 347 120-347V

▶▶▶ PHOTOMETRIC DIAGRAMS


Specialized anti glare optical lens to deliver symmetric lighting solution
60°/90°/120°

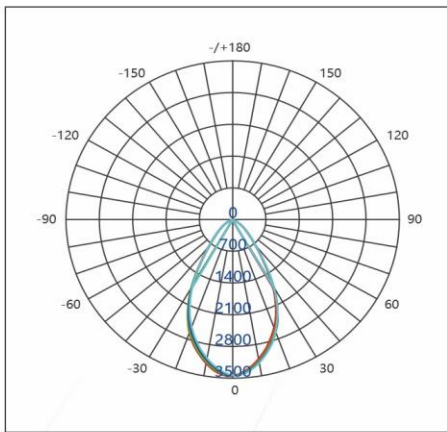

cd/klm

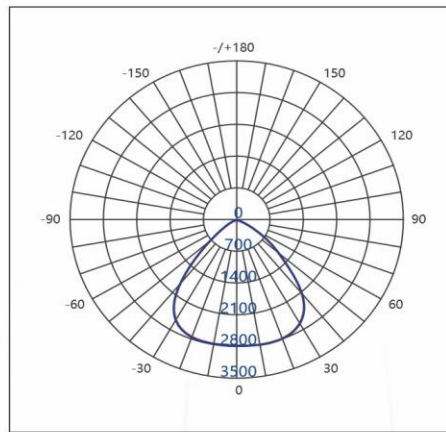

cd/klm

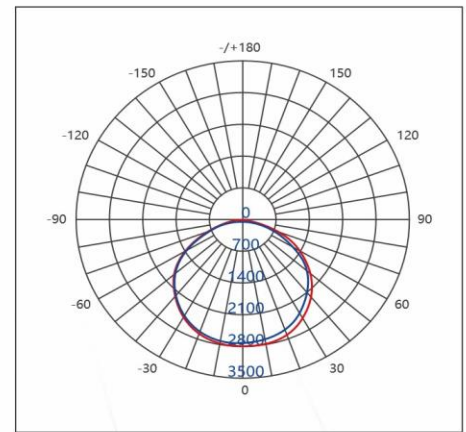

cd/klm





APPLICATION AREAS

- Outdoor large sports arena
- warehouse
- Exhibition hall
- garage
- Outdoor football field
- Shipyard
- Sports center
- Stadium
- Logistics center
- factory



